



ClicWall

Seamless and immediately
finished MDF walls

ClicWall

A revolution in wall-cladding systems

Quick, easy and immediately finished

ClicWall is UNILIN's revolutionary wall-cladding system using patented **Uniclic® technology**, famous for QuickStep in the UNILIN Flooring Division. The panels swiftly and easily click into each other, making ClicWall **up to 5 times faster** than more traditional wall-cladding systems such as plasterboard. In addition, a virtually **seamless result** is obtained and the wall is **finished immediately and durably**. The standard dimensions of the panels are 600 mm wide, 2785 mm high and 10 mm thick. Alternative dimensions are available on request.

ClicWall combines **unrivalled ease of installation** with contemporary aesthetics thanks to a **wide range of decors and accessories**. All decors are also available as boards for made-to-measure furniture applications.

Fireproof and acoustic comfort

ClicWall is available with a **1-hour fire resistance** (FR 60). This specific set-up with fire-retardant ClicWall panels (ClicWall FR) is supported by a European certificate and meets **the most stringent fire-safety requirement**. The **fire reaction** of the individual ClicWall FR panels achieves Euro Class **B-S2-D0**. The same set-up guarantees an **acoustic value of 48 dB**.

Finishing as desired

Would you like to finish ClicWall entirely to your choice? This is perfectly possible with **ClicWall Deco**. Based on the existing version of ClicWall, ClicWall Deco comes with a paint-grade layer, allowing you to **finish your panels using paint, textile sheet, wallpaper and even digital print!**



8 reasons to choose ClicWall



Easy installation

ClicWall is equipped with the unique and worldwide-patented Uniclic® system which makes the panels very easy to hook into each other and click together.



Joint-free system

The joints between the panels are made almost invisible by the patented Uniclic® system for an aesthetically perfect result.



Fast assembly

ClicWall can be installed very quickly. Moreover, after installation the panels do not have to be finished and no time is lost with pointing or sanding.



Fire-resistant

With a 1-hour fire resistance (FR 60), ClicWall meets the most common fire-safety requirement.



Scratch-resistant

The MDF panels have a robust, scratch-resistant melamine layer on both sides.



Hygienic and splash-proof

The ClicWall surface is extra hygienic because dirt adheres to it less easily and because of its washable top layer. The melamine layer protects the panels and makes them splash-proof.



UV resistant

ClicWall is UV resistant, so the panels retain their colour and continue to look like new.



Acoustic comfort


In a specific set-up ClicWall provides a very high acoustic comfort value of 48 dB and thus readily achieves the most current sound-proofing requirements.




ClicWall is environment-friendly, thanks to the use of PEFC-labelled wood varieties.

ClicWall versus Plasterboard

Installation time

ClicWall	Plasterboard
<p>Step 1. Erect substructure (metal or wooden substructure)</p> <p>Step 2. Mount ClicWall (6 to 7 fixing points per panel)</p>	<p>Step 1. Erect substructure (metal or wooden substructure)</p> <p>Step 2. Mount plasterboard (20 to 25 fixing points per panel)</p> <p>Step 3. Fill fixing holes and joints</p> <p>Step 4. Drying time</p> <p>Step 5. Smooth/sand joints and holes</p> <p>Step 6. Apply primer coating</p> <p>Step 7. Drying time</p> <p>Step 8. Paint finishing colour (may require 2 coatings)</p> <p>Step 9. Drying time</p>
	

Cost

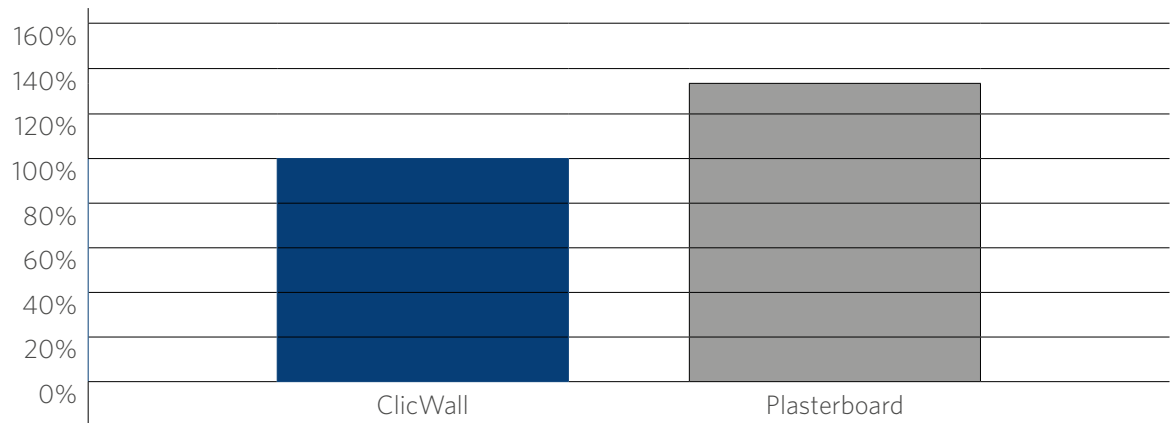


ClicWall = faster delivery of the project = less additional cost



Decors in stock


Colours

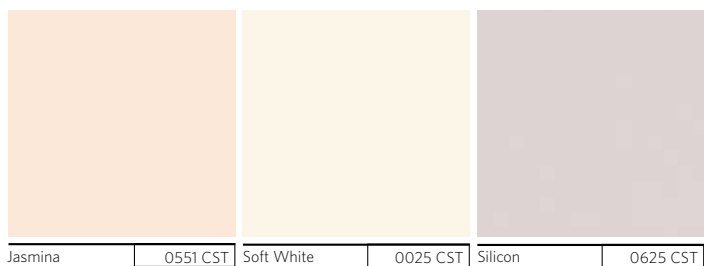

Woods



Fantasies

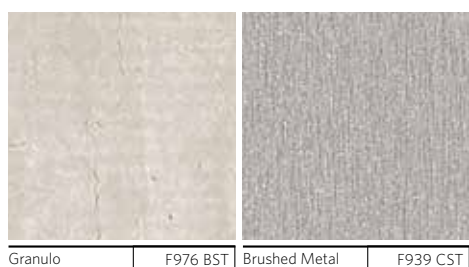

ClicWall Deco



ClicWall is **standardly available from stock in 10 decors**. **Decors request can be supplied from 160 panels**.
Request your ClicWall sample on www.unilinpanels.com.

Soft White (0025 CST), Soft White Linewood (0025 W03) and Silicon (0625 CST) are also available as **Fire Retardant from stock**.
All other decors are also available as **Fire Retardant to order**.

Surface structures

CST = soft pearl - BST = top mat - W03 = structured Linewood















All decors are also **available as boards** (HPL & MFC products) for made-to-measure furniture applications from the Formica®Unilin collection, except Granulo (F976 BST).













Decors on request

Colours

											
Azure White	WA12 CST	Magnolia	U222 CST	Creamy	UD59 CST	Surf	U147 CST	Turtle Grey	U292 CST	Dune Beige	U127 CST




											
Lemon	U285 CST	Lime	U270 CST	Chrome Yellow	U136 CST	Spectrum Yellow	U135 CST	Levante	U279 CST	Clementine	U272 CST

											
Maui	U142 CST	China Blue	U267 CST	Fossil	U145 CST	Seed	U144 CST	Folkestone	U271 CST	Iron	U146 CST

							
Tornado	UD26 CST	Citadel	U129 CST	Quartz	UD81 CST	Diamond Black	O113 CST

Decors on request

Woods

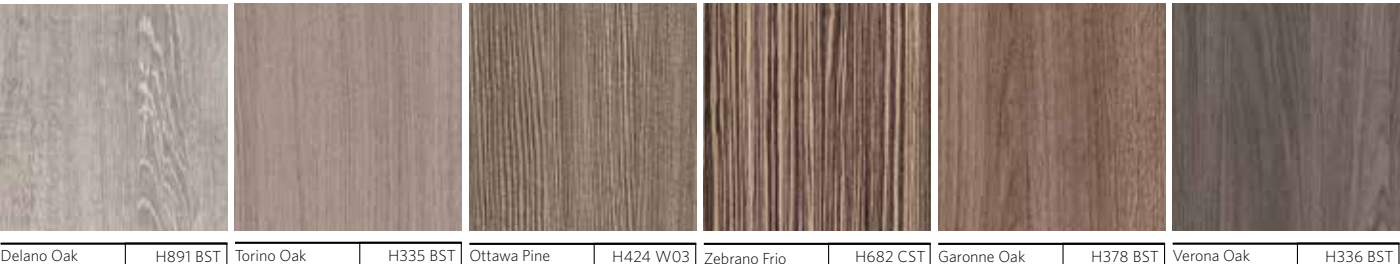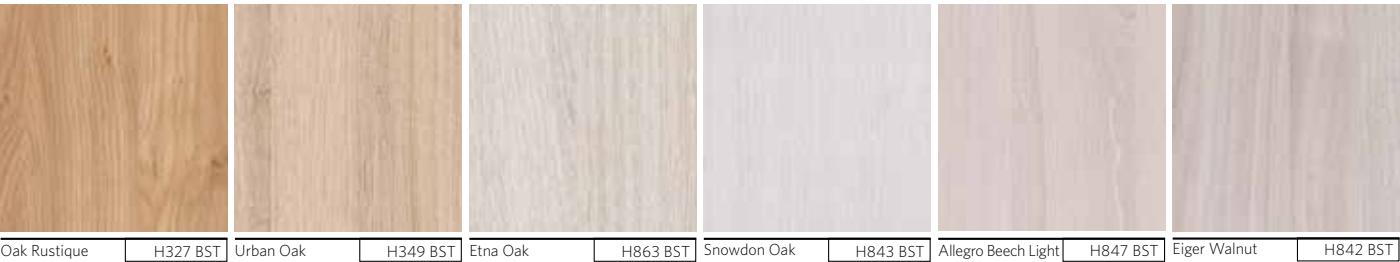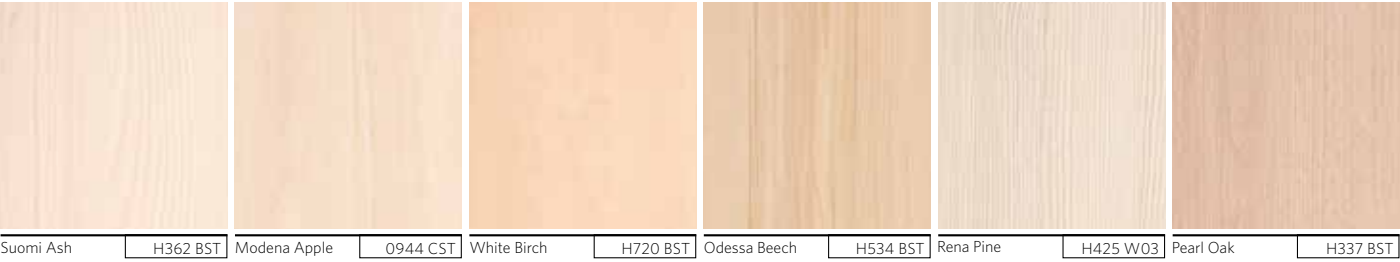

Decors on request

Woods



											
Kabongo	H680 BST	Italian Walnut	H561 BST	Scafell Oak	H848 BST	Vosges Pear	H624 CST	Country Cherry	H480 CST	Redwood	H685 CST

											
Arabica Walnut	H562 BST	Janga Oak	H845 W03	Gestola Oak	H846 BST	Kivu Wenge	H687 CST	Belisio Oak	H320 BST	Bellavista Oak	H844 BST

							
Logan Oak	H892 BST	Nevis Oak	H894 W03	Hudson Oak	H385 W03	Fumed Oak	H850 CST

Fantasies

											
Woven	F981 CST	Tweed	F982 CST	Patina Brush	F983 CST	Earth	U130 W03	Alu	F934 CST	Metallic	F933 CST

			
Blue Jeans	F984 CST	Diamond Black Linewood	UD35 W03

Technical info and installation

Afmetingen

2785 x 618 x 10 mm (gross)
2785 x 600 x 10 mm (net)
Non-standard dimensions on request

Decors

10 decors available from stock - 76 extra decors on request

Fire resistance

Fire resistance (non-load-bearing dividing wall): 60 min (EI60)
Wall height 2785 mm - Profile width: 50 mm
Plating: anti-flame 12 mm - Clicwall FR 10 mm (Euroclass B-S2;D0)
Mineral wool: 35 kg/m³
Substructure: metal stud 50 mm
Sealing: PE50 tape

Acoustic

48 dB in fire-resistant set-up 60 min

Finishing

Flexible indoor and outdoor corner profiles with matching decor
Aluminium outdoor corner profile with minimalist design
Paintable skirting board: with Incizo technology you can cut to any desired height
Skirting board with matching decor

Possible substructures

Combined substructures are also an option



Metal substructure



Wooden substructure




Wooden slats directly on the wall

Possible fixing systems



Screws

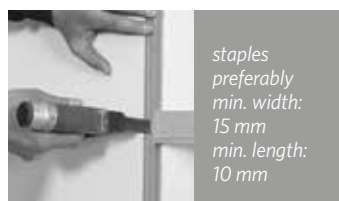

Staples



Glue with powerful elastic glue kit

Please refer to the ClicWall installation guide on www.unilinpanels.com for installation instructions and technical specifications.

ClicWall is a product from UNILIN panels division, part of the UNILIN group.
UNILIN forms part of the American company MOHAWK INDUSTRIES, INC. UNILIN comprises:

UNILIN, flooring division (laminates, parquet and LIVYN)

UNILIN, panels division (boards, decorative panels and finished products)

UNILIN, insulation division (roofing elements and insulation panels)

UNILIN stands for (r)evolution. Thanks to continuous innovation, investing in design, research & development and the latest technologies, our divisions have developed into top players. Our success is based on the UNILIN spirit underlying our mission: we create beautiful and convenient quality products for your home.



UNILIN bvba, division panels
Ingelmunstersteenweg 229, 8780 Oostrozebeke - Belgium
T +32 56 66 70 21 - F +32 56 66 82 25 - info.panels@unilin.com - www.unilinpanels.com